

Complete System for Vehicle-to-Trailer Wiring

Here's all you need for fast and easy trailer light hookup:

Part 1
**Vehicle
Connector**






Part 2
**Trailer
Connector**

Just select a Vehicle Connector (Part 1) AND a Trailer Connector (Part 2) by the part numbers and description listed in the Illustrated Parts Guide.

INSTRUCTIONS FOR INSTALLATION:

- Step 1** Open the tailgate door and remove the trim plate as shown in Fig. 1.
- Step 2** Remove the spare tire and jack. Then remove the left side panel as shown in Fig. 2.
- Step 3** Locate the modded electrical connector (Fig. 2) for the vehicle rear lighting system.
- Step 4** Unplug this connector and insert the Vehicle Connector as shown (Part 3).
- Step 5** Plug Vehicle Connector (Part 1) into Trailer Connector (Part 2) — ground the white wire (D). Connect the system to the trailer. Test trailer lights. The installation is complete.

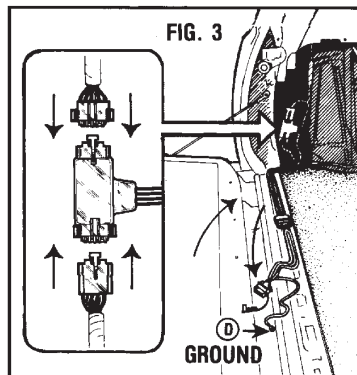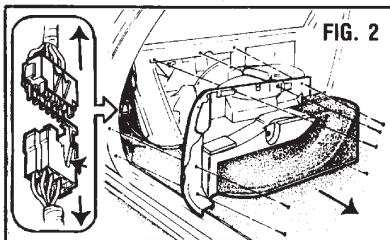

NOTE: To increase the service life of and to prevent damage to the assembled system, secure it to your vehicle with ties or electrical tape.

TIPS: To help prevent corrosion, coat all electrical connections with a lubricant; white grease, petroleum jelly, or other quality lubricant. Rapid flashing of turn signals can be eliminated with a heavy duty flasher purchased separately.