DW300 CTS-V Dual Pump Module
2009-2015 Cadillac CTS-V
PN# 9-307-7200



The DeatschWerks DW300 CTS-V Dual Pump Module includes two DW300 pumps, integration of the OE returnless fuel line, and retention of ALL the functionality of OE module. The DW300 CTS-V module consists of a top-hat, center section, and lower bucket. These components work together to deliver the flow you need and the OE functionality you want.


- OEM Tank Fitment
- Keeps OEM Level Sensor, Capacity and Surge Features
- 50% More Flow Than OEM Module
- Factory Plug and Play Operation with 2009-2015 CTS-V

Specifications

Material	Polyoxymethylene (POM)
Feed Fitting	OEM 3/8" Male EFI Quick Connect
Module Wiring	OEM Harness
Pump Fitment	DW300 (9-307)
Working Pressure	Up to 90psi
Flow At 58PSI	455 LPH (2 GPM)
Draw At 58PSI	30.5 Amps

Note: *A 10-gauge hardwire kit is recommended for optimum performance.*

Comparative Flow Data

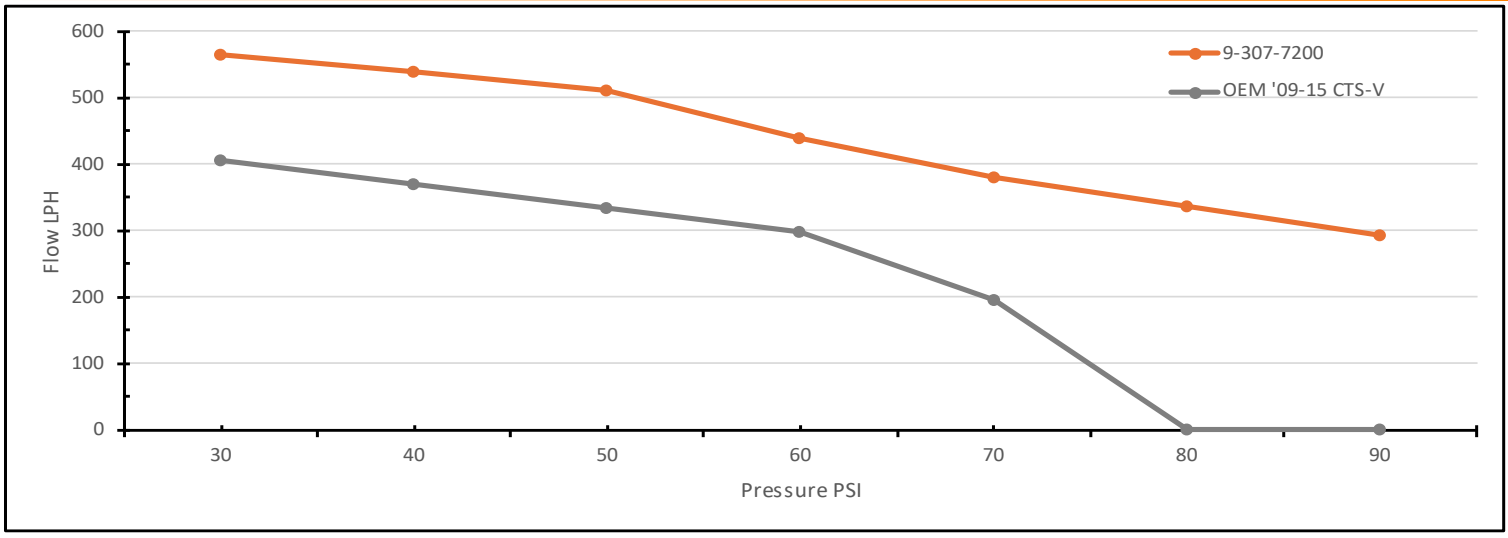

Note: All Horsepower, flow and amperage ratings tested at 13.5v and 10awg wiring.

THIS PRODUCT MAY BE USED SOLELY ON VEHICLES USED IN SANCTIONED COMPETITION WHICH MAY NEVER BE USED UPON A PUBLIC ROAD OR HIGHWAY, UNLESS PERMITTED BY SPECIFIC REGULATORY EXEMPTION

DeatschWerks, LLC 405-217-0701 techsupport@deatschwerks.com REV 9-18-24

In-Tank Pump
DW200 (9-201)

Features & Benefits

Product Blurb

Color Picture

- Bullet Points
-
-
-
-

Delivery Characteristics

Specifications

Weight
External Materials
Inlet Fitting
Outlet Fitting
PRV Activation
Impeller Design
Connector Terminal
Min Voltage Input
Max Voltage Input
Current Draw

PSIG	30	40
AMP		
LPH		


Dimensions

Line/CAD Drawing

THIS PRODUCT MAY BE USED SOLELY ON VEHICLES USED IN SANCTIONED COMPETITION WHICH MA
PERMITTED BY SPECIFIC REGULATORY EXE

DeatschWerks, LLC 405-217-0701 techsupport@deatsc

Flow Chart

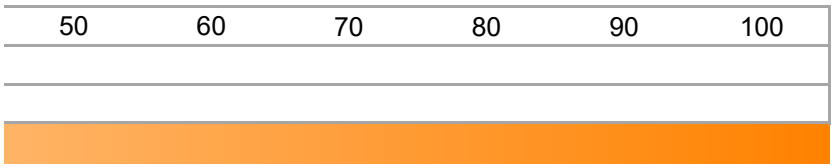

AY NEVER BE USED UPON A PUBLIC ROAD OR HIGHWAY, UNLESS
EMPTION

hwerks.com REV 10-31-16