
©1987 TECHLIT CO.
Printed in U.S.A.

# GENERAL EXPLODED VIEW
# FORD MULTI-POINT ELECTRONIC FUEL INJECTION
# 5.0L V8 ENGINE



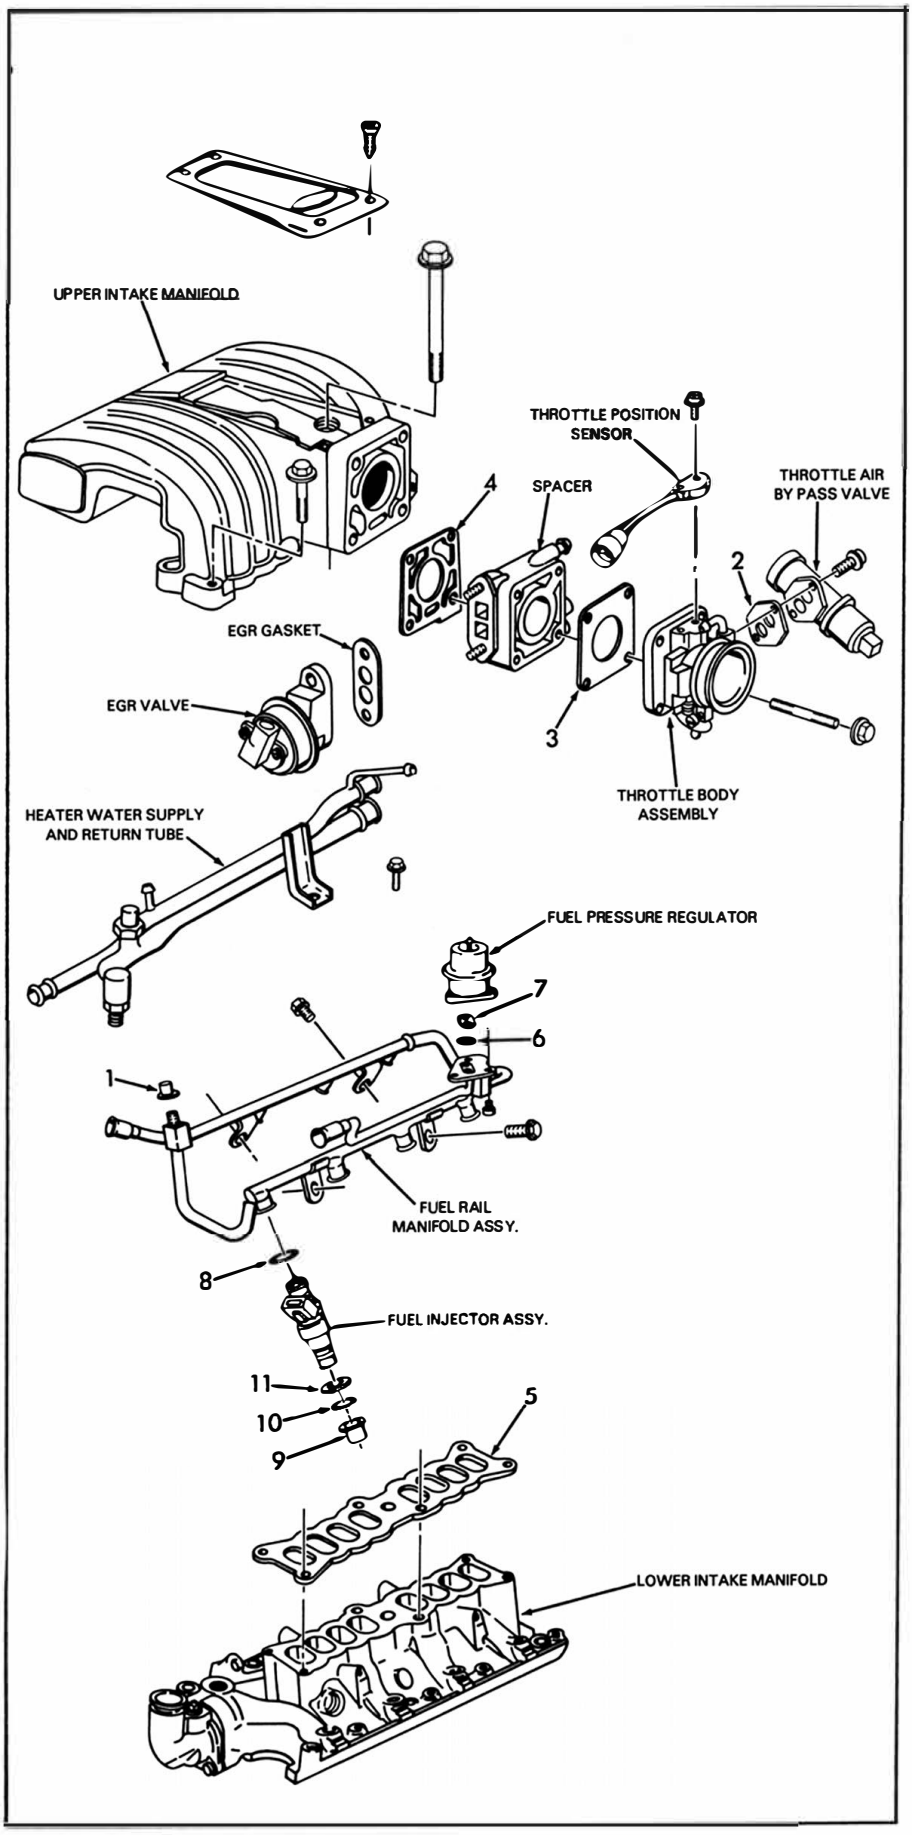


### SPECIAL INFORMATION

NOTE: IF SCRAPING IS NECESSARY TO REMOVE OLD GASKETS, BE CAREFUL NOT TO DAMAGE GASKET SURFACES.

O-RINGS - LUBRICATE WITH LIGHT ENGINE OIL. (NEVER USE SILICONE GREASE. IT WILL CLOG THE INJECTORS.)

### NOMENCLATURE

REF. NO.

1. CAP - FUEL PRESSURE RELIEF
2. GASKET - AIR BY PASS VALVE
3. GASKET - THROTTLE BODY TO SPACER
4. GASKET - SPACER TO UPPER MANIFOLD
5. GASKET - UPPER TO LOWER MANIFOLD
6. O-RING - FUEL PRESSURE REGULATOR
7. GASKET - FUEL PRESSURE REGULATOR
8. O-RING - INJECTOR RAIL SEAL
9. CAP - FUEL INJECTOR PINTLE PROTECTION
10. O-RING - INJECTOR MANIFOLD SEAL
11. WASHER - INJECTOR MANIFOLD SEAL O-RING

### TORQUE SPECIFICATIONS

| DESCRIPTION | N°M | LB - FT ORIN. |
|---|---|---|
| UPPER TO LOWER INTAKE MANIFOLD BOLTS | 20-30 | 15-22 LB. FT. |
| THROTTLE BODY TO EGR SPACER AND UPPER INTAKE MANIFOLD | 17-24 | 12-18 LB. FT |
| AIR BY PASS VALVE TO THROTTLE BODY | 8-11 | 71-102 LB. IN. |
| THROTTLE POSITION SENSOR TO THROTTLE BODY | 1.2-1.8 | 14-16 LB. IN. |
| FUEL PRESSURE REGULATOR TO FUEL RAIL ASSEMBLY | 3-4.5 | 27-40 LB. IN. |
| FUEL RAIL ASSEMBLY TO INTAKE MANIFOLD | 8-11 | 70-105 LB. IN. |
| THROTTLE CABLE BRACKET TO MANIFOLD | 11-13 | 8-10 LB. FT. |