
ORACLE LIGHTING

PART #: 5921-2-BZL | 5921-4-BZL 4/3/26


VEGA Flushmount Instructions

1.

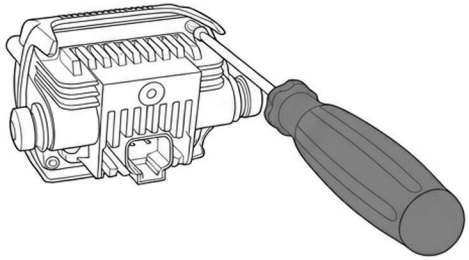


Using a t10 torx bit, remove the 4 screws located on the back of the Vega.

2.

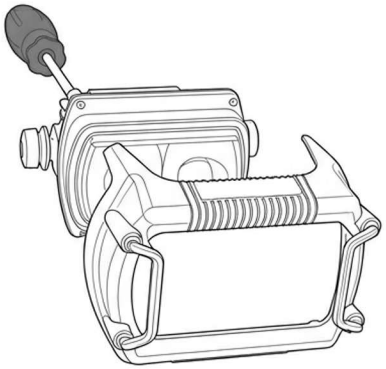


Remove the front plate and set aside.

3.

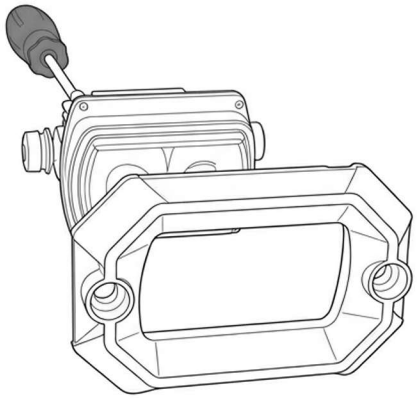


Position the flush mount bracket, aligning posts with the holes on the back of the vega

4.

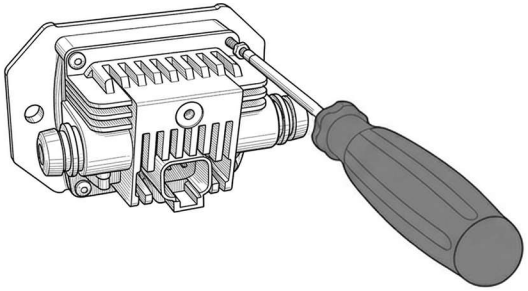

Using 5/64th allen head or a t9 torx bit, insert 4 included self tapping screws. Be cautous not to overtighten.

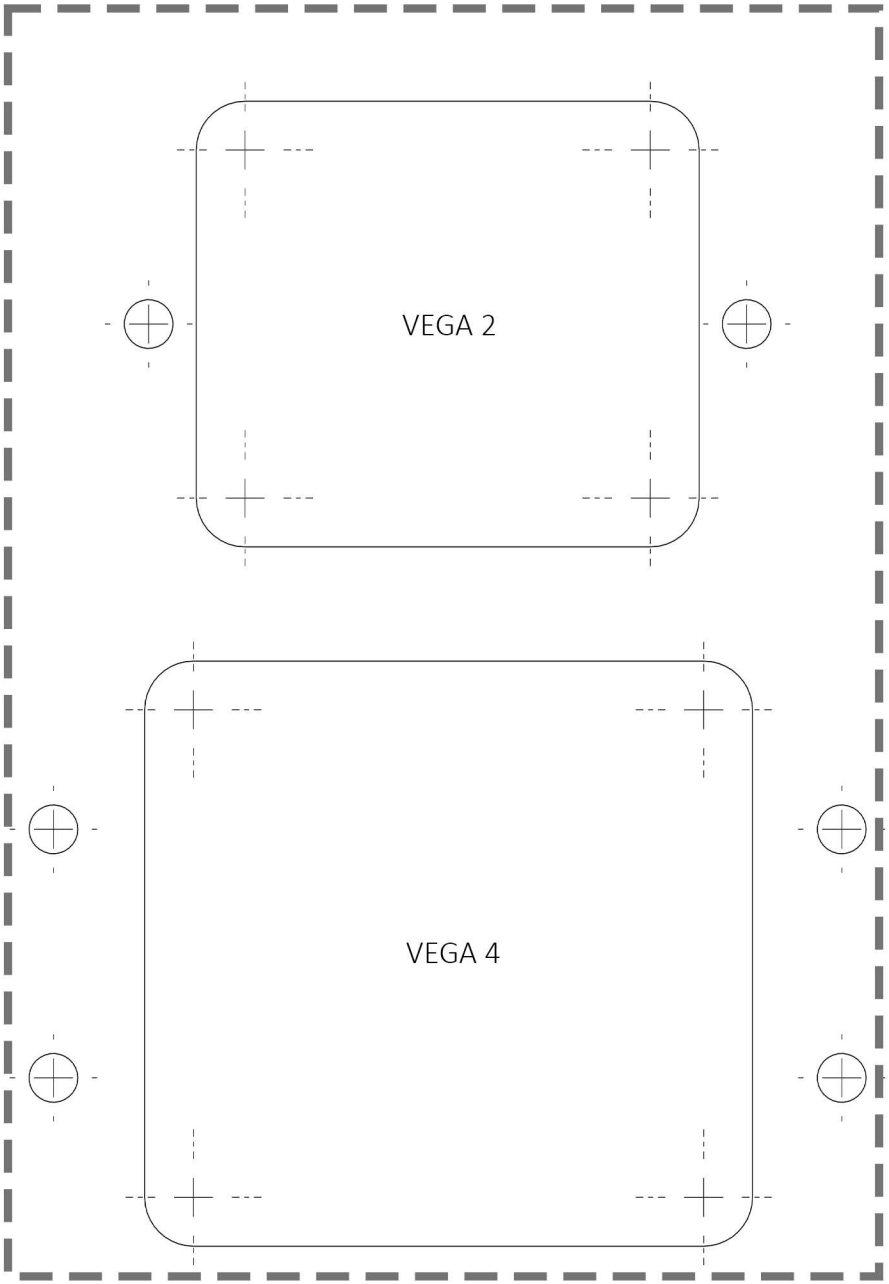

1. Adhere the above template to surface.
2. Use a 1/4” drill bit for the mouinting holes.
3. Use a 1/2” drill bit to make the corners of your main cuttout. Be cautous to stay within cutting region to avoid exposed cuts.