



COLD AIR
INTAKE SYSTEM

INSTALLATION
INSTRUCTIONS

Not legal for sale or use in California on any pollution controlled motor vehicle.

50-3082

CHEVROLET / GMC / CADILLAC


2014-19 Silverado 1500 / Sierra 1500

2015-20 Tahoe / Suburban / Yukon / Escalade ESV

V8-5.3L / 6.2L

TOOLS NEEDED:

- Ratchet
- Extension
- 10mm socket
- Flat blade screwdriver
- T10 torx
- 4mm allen key
- 3mm allen key
- 3/16" wrench
- Side cutters

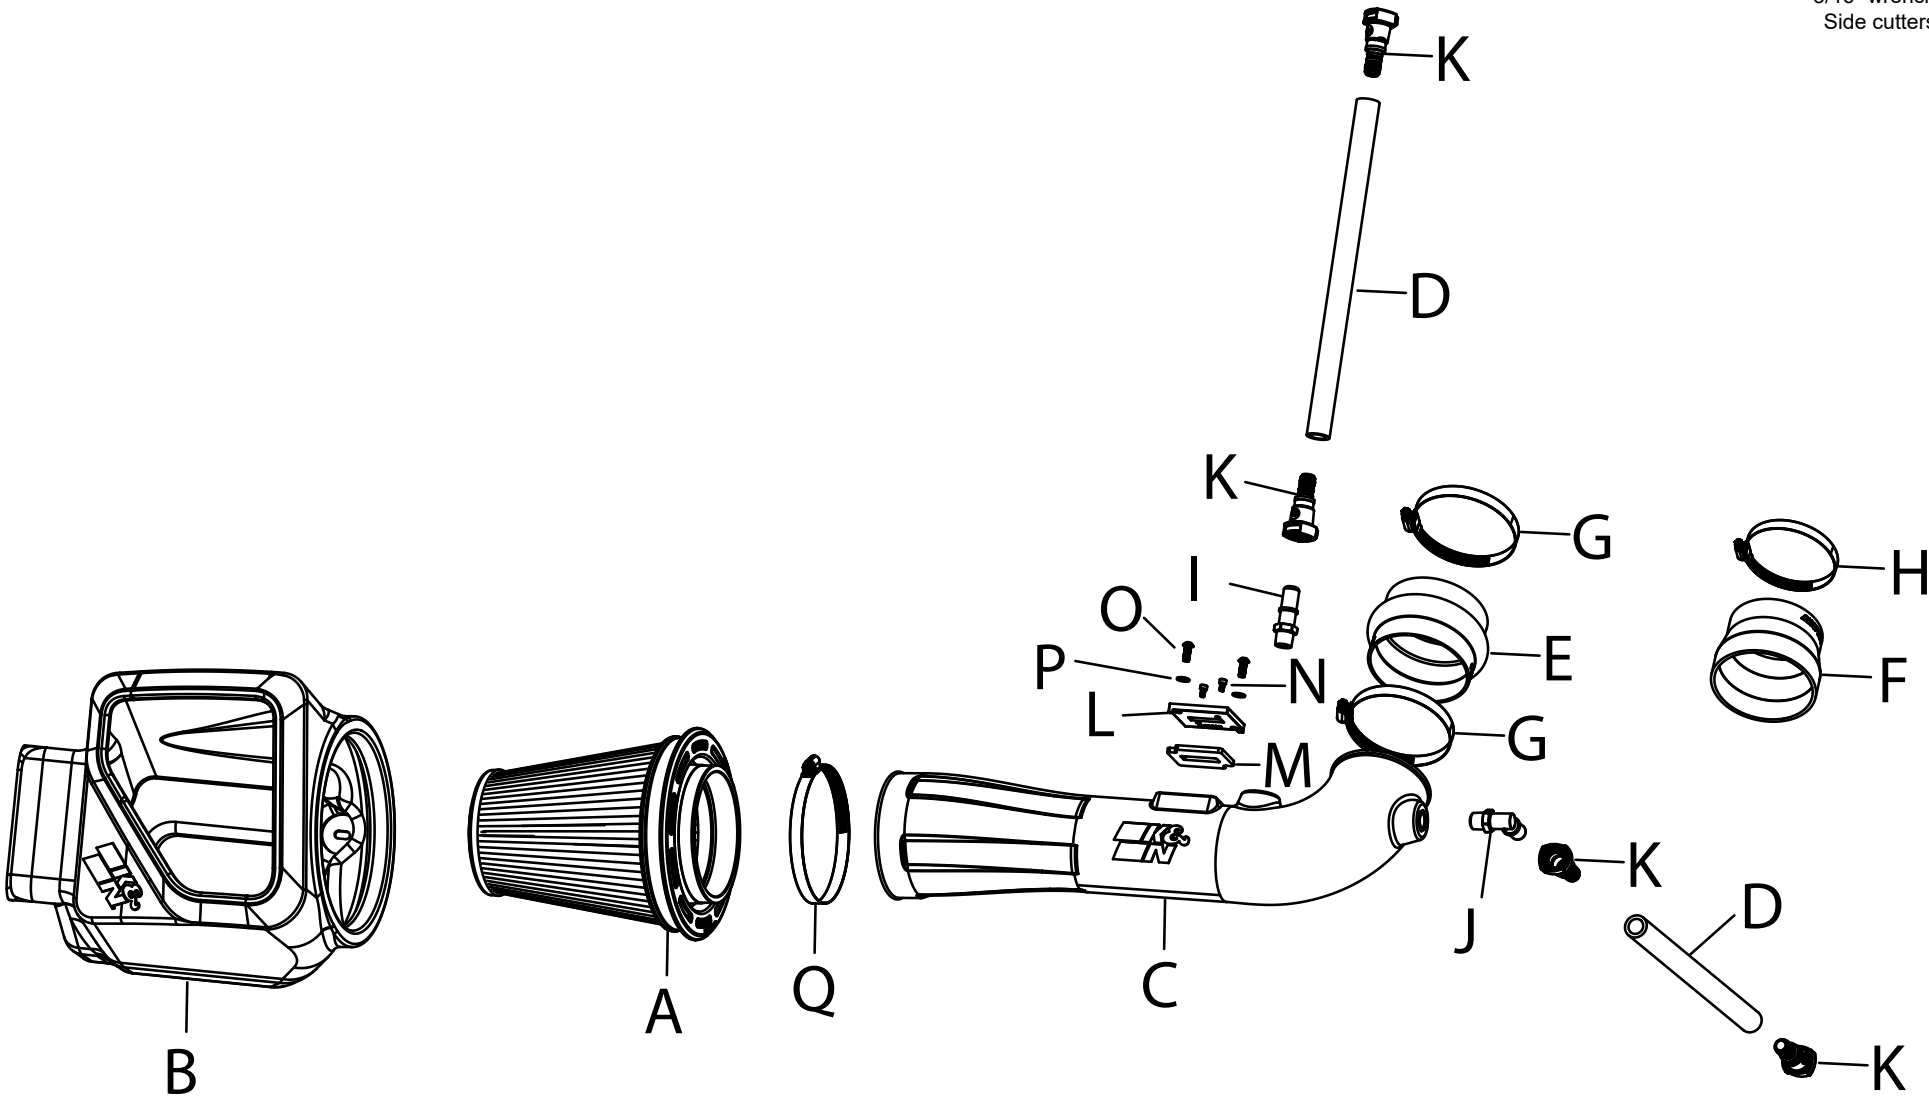

PARTS LIST:

Description	Qty.	Part #	Description	Qty.	Part #	Description	Qty.	Part #
A AIR FILTER	1	RU-5301	G HOSE CLAMP; #64 BLACK	2	08645KA	M GASKET; PORON	1	09069
B AIR BOX	1	087608	H HOSE CLAMP; #56 BLACK	1	08620KA	N BOLT; M4-.7 X 8MM	2	07733
C TUBE	1	087609	I FITTING; QC 3/8" NPT	1	82637-1	O BOLT; M6X1X16MM	2	07730
D HOSE; 5/8" X 14"L	2	084083	J FITTING; QC 3/8" NPT 90DEG	1	082634	P WASHER; FLAT SS	2	08269
E HOSE; HUMP 4" X 3"L	1	08418	K FITTING; QC DISCONNECT	4	08526	Q HOSE CLAMP; #88 BLACK	1	KITHS88K
F HOSE; 4" TO 3.5"	1	08497	L ADAPTOR; MAF SENSOR	1	21515-1			

If you need any assistance please call 1-800-858-3333 to speak with a representative in our Customer Service Center before returning the product.

NOTE: FAILURE TO FOLLOW INSTALLATION INSTRUCTIONS AND NOT USING THE PROVIDED HARDWARE MAY DAMAGE THE INTAKE TUBE, THROTTLE BODY AND ENGINE.

TO START:

1. Turn off the ignition and disconnect the negative battery cable.
NOTE: Disconnecting the negative battery cable erases pre-programmed electronic memories. Write down all memory settings before disconnecting the negative battery cable. Some radios will require an anti-theft code to be entered after the battery is reconnected. The anti-theft code is typically supplied with your owner's manual. In the event your vehicles anti-theft code cannot be recovered, contact an authorized dealership to obtain your vehicles anti-theft code.



2. Release the red locking tab and then disconnect the mass air sensor electrical connection, unhook the wiring harness from the air filter housing.



3. Depress the grey locking tabs, then disconnect the CCV hoses from the intake plenum.

Continued

INSTALLATION INSTRUCTIONS



4. Loosen the hose clamps that secure the intake plenum to the throttle body and air filter housing.



8. Install the K&N air filter housing so the fresh air intake passes through the opening in the inner fender and then secure to the inner fender with three factory bolts removed in the previous step.



12. Remove the mass air sensor from the factory air filter housing and then install the sensor into the provided adapter using the provided bolts. Install the adapter gasket onto the bottom of the adapter.



5. Disconnect the plenum from the air filter housing and throttle body and remove from the engine.



9. Install the K&N air filter into the K&N air filter housing.



13. Install the mass air sensor assembly into the K&N intake tube so the opening is towards the filter end of the tube. Secure the assembly with the provided hardware.




6. Lift the air filter housing up and then slide slightly to the right, then remove the housing from the vehicle.



10. Depress the grey locking tabs and then remove the factory CCV hoses from the valve covers.



14. Install the provided CCV quick connect fittings into the K&N intake tube as shown. NOTE: the CCV fittings utilize 3/8npt threads, Hand tight the fittings and then use a wrench to tighten one revolution.

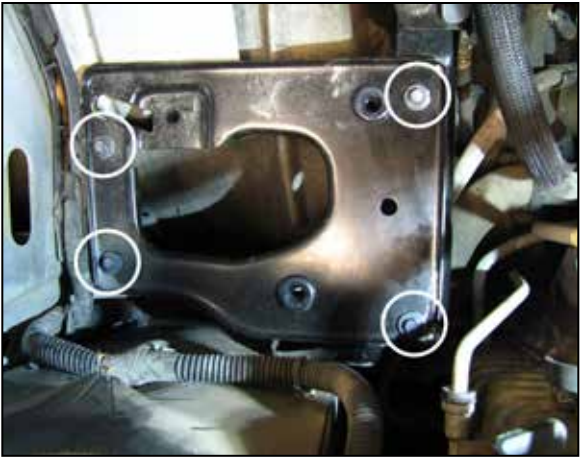

7. Remove the four bolts that secure the air filter housing mounting plate and then remove the plate from the vehicle. NOTE: Three of the bolts will be reused in the next step.



11. Install the step coupler (#08497) on 5.3L engines, hump coupler (#08418) on 6.2L engines and secure with the provided hose clamp.



15. Install the K&N intake tube assembly into the air filter and then into the coupler, adjust the tube for best fit and then secure with the provided hose clamps.



16. Trim one of the provided CCV hoses to ten inches. Install the provided CCV quick connect fittings into the CCV hoses as shown.



17. Install the ten inch CCV hose assembly onto the passenger side CCV connections and the fourteen inch CCV hose assembly to the driver side CCV connections.



18. Reconnect the mass air sensor electrical connection.



19. Reconnect the vehicle's negative battery cable. Double check to make sure everything is tight and properly positioned before starting the vehicle.

20. It will be necessary for all K&N® high flow intake systems to be checked periodically for realignment, clearance and tightening of all connections. Failure to follow the above instructions or proper maintenance may void warranty.

ROAD TESTING:

1. Start the engine with the transmission in neutral or park, and the parking brake engaged. Listen for air leaks or odd noises. For air leaks secure hoses and connections. For odd noises, find cause and repair before proceeding. This kit will function identically to the factory system except for being louder and much more responsive.
2. Test drive the vehicle. Listen for odd noises or rattles and fix as necessary.
3. If road test is fine, you can now enjoy the added power and performance from your kit.
4. K&N Engineering, Inc., requires cleaning the intake system's air filter element every 100,000 miles. When used in dusty or off-road environments, our filters will require cleaning more often. We recommend that you visually inspect your filter once every 25,000 miles to determine if the screen is still visible. When the screen is no longer visible some place on the filter element, it is time to clean it. To clean and re-oil, purchase our filter Recharger® service kit, part number 99-5050 or 99-5000 and follow the easy instructions.