INSTALLATION INSTRUCTIONS
Part Number: 33-2054

SEE CATALOG FOR CURRENT APPLICATIONS

*** FREE K&N® decal To register your warranty, please see us online at knfilters.com/register. FREE K&N® decal ***


Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N Filtercharger® seals properly.

If you need any assistance please call 1-800-858-3333 to speak with a representative in our Customer Service Center before returning the product.

INSTALLATION:

1) Remove the stock air filter
2) Postition the plastic cage onto the filter element as shown below
3) Slide the K&N® Air Filter/Cage assembly into the air box. Make sure it is properly seated on the sealing surface.
4) Close the access door of the air box.
5) To remove the filter assemble, gently pull on the filter material until the assembly is free to slide out.
   CAUTION: Use only gentle finger pressure to remove the filter. Do not use any tools or the filter material may be damaged.
6) **Clean an area on the air box and apply the "K&N Stop" decal. The decal will notify others who may be working on this vehicle that this a washable/reuseable air filter.**

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.

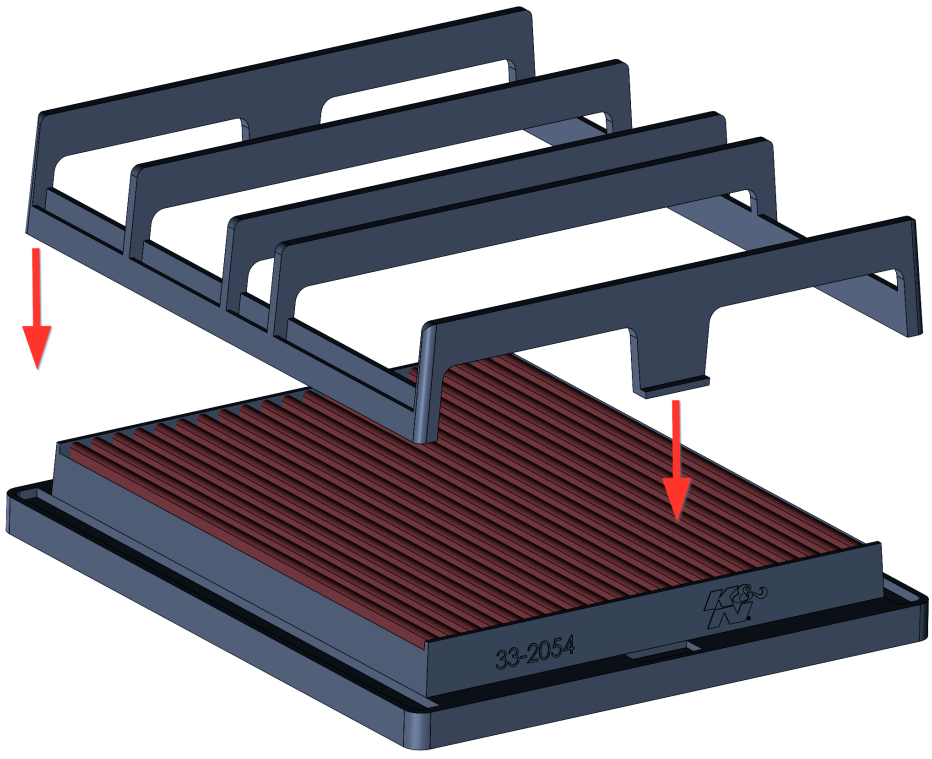

CLEANING:

K&N Engineering, Inc., suggests checking the air filter element periodically for excessive dirt build-up. Depending on your driving conditions, we recommend cleaning your air filter every 50,000 miles. To clean and re-oil, purchase our filter Recharger® service kit, part number 99-5050 or 99-5000 and follow the easy instructions.