

Complete System for Vehicle-to-Trailer Wiring

Here's all you need for fast and easy trailer light hookup:

Part 1
Vehicle
Connector





Part 2
Trailer
Connector

Just select a Vehicle Connector (Part 1) AND a Trailer Connector (Part 2) by the part numbers and description listed in the Illustrated Guide.

INSTRUCTIONS FOR INSTALLATION:

- Step 1** Locate the factory installed electrical connectors A Fig. 1 that joins the vehicle rear lighting system. They can be found behind the rear bumper. (See Fig. 2)
- Step 2** Unplug these connectors (See Fig. 3) and insert the vehicle connector as shown B as shown (See Fig. 4) making sure the one marked "Left Driver" is installed on the driver side of the vehicle and that the one marked "Right Passenger" is installed on the passenger side.
- Step 3** Plug vehicle connector B (Part 1) into Trailer Connector C (Part 2). Ground the white wire D on the Trailer Connector to the vehicle frame. Connect the system to the trailer E. Test trailer lights. The installation is complete.

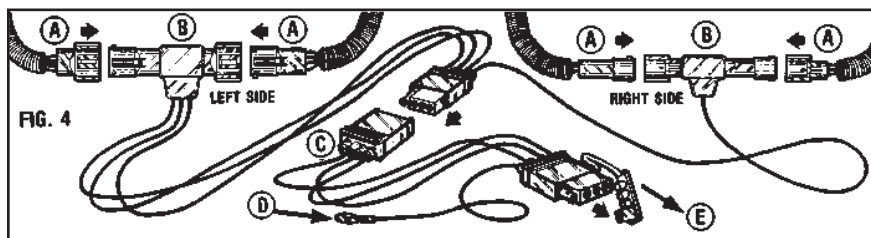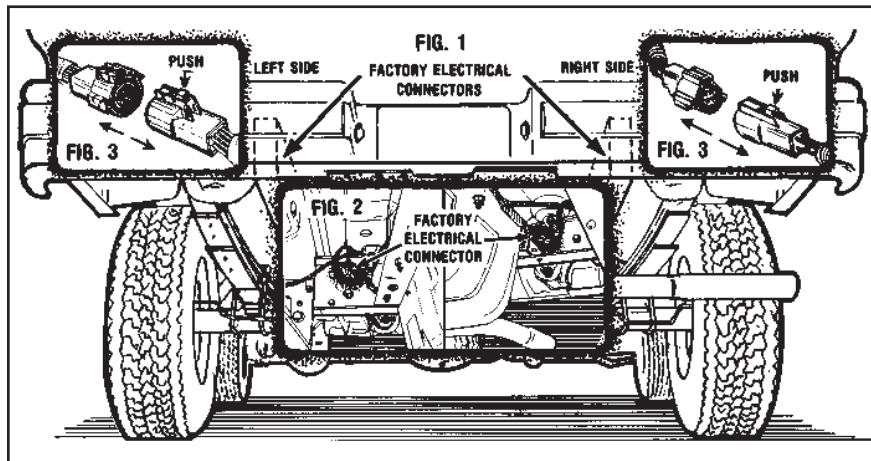

NOTE: To increase the service life of and to prevent damage to the assembled system, secure it to your vehicle with ties or electrical tape.

TIPS: To help prevent corrosion, coat all electrical connections with a lubricant; white grease, petroleum jelly, or other quality lubricant. Rapid flashing of turn signals can be eliminated with a heavy duty flasher purchased separately.